



深沟球轴承

Deep Groove Ball Bearing



基本类型 Basic type

单列深沟球轴承可以承受径向和轴向载荷，而且允许转速很高。深沟球轴承是不可拆分的。密封的深沟球轴承可免维护，并能使结构简化。由于这些特征和其低廉的价格，使它成为应用最广泛的轴承类型。但深沟球轴承的自动调心能力是有限的。

The single-row deep groove ball bearing can bear the radial and axial loads, and allows a very high rotation speed. The deep groove ball bearing is non-detachable.

The sealed deep groove ball bearing is free of maintenance, and can simplify the structure. These characteristics and its low price enable it to be the bearing with the widest application. However, the self-aligning ability of deep groove ball bearing is limited.

深沟球轴承的基本类型有开式、双面带密封圈或双面带防尘盖式。出于生产的需要，带密封的轴承在外圈上开有可装密封圈或防尘盖的沟槽，也可作为开式轴承供货。

The basic types of deep groove ball bearing are the open type, double-face with sealing ring type, or double-face with dust cap type. As needed in the production, the bearing with sealing has the groove on the outer ring, where the sealing ring or dust cap may be mounted, or it may also be supplied as the open bearing.





开式无沟槽深沟球轴承
Deep groove ball bearing without groove




外圈带沟槽的深沟球轴承（例）
Deep groove ball bearing with groove on the outer ring(Example)



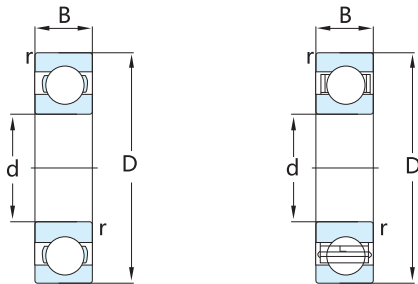


基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Speed Limiting Speed		质量 Mass
d	D	B	r _{min}	C	C ₀	-			kg
mm				kN			r/min		
70	110	20	1.1	39.7	31	6014	13000	8000	0.61
	125	24	1.5	63.7	45	6214	11000	7000	1.1
	150	35	2.1	111	68	6314	9500	6300	2.55
	180	42	3	143	104	6414	8500	5300	4.95
75	115	20	1.1	41.6	33.5	6015	12000	7500	0.65
	130	25	1.5	68.9	49	6215	10000	6700	1.71
	160	37	2.1	119	76.5	6315	9000	5600	3.05
	190	45	3	153	114	6415	8000	5000	5.8
	105	16	1.9	24.2	19.3	61915	13000	8000	0.42
80	125	22	1.1	49.4	40	6016	11000	7000	0.86
	125	14	0.6	35.1	31.5	16016	11000	7000	0.71
	140	26	2	72.8	55	6216-Z	9500	4800	1.55
	140	26	2	72.8	55	6216	9500	6000	1.448
	170	39	2.1	130	86.5	6316	8500	5300	3.61
	200	48	3	163	125	6416	7500	4800	6.76
85	130	22	1.1	52	43	6017	11000	6700	0.848
	150	28	2	87.1	64	6217	9000	5600	1.803
	150	28	2	87.1	64	6217M	9000	8000	2
	150	28	2	87.1	64	6217-Z	9000	4500	1.82
	180	41	3	140	96.5	6317	8000	5000	4.284
	210	52	4	174	137	6417	7000	4500	7.933
90	140	24	1.5	60.5	50	6018	10000	6300	1.1
	140	16	1	43.6	39	16018	10000	6300	1.018
	160	30	2	101	73.5	6218M	8500	5300	2.97
	190	43	3	151	108	6318	7500	4800	4.97
	190	43	3	151	108	6318M	7500	7000	6.25
	225	54	4	186	150	6418	6700	4300	9.8
	125	18	1.1	33.2	31.5	61918	11000	6700	0.68
	115	13	1	19.5	17	61818	11000	7000	0.303
95	170	32	2.1	114	81.5	6219	8000	5000	2.75
	200	45	3	159	118	6319	7000	4500	5.74
	130	18	1.1	33.8	33.5	61919M	10000	6300	0.67



基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Speed Limiting Speed		质量 Mass
d	D	B	r _{min}	C	C ₀				kg
mm				kN			r/min		
100	150	16	1	46.2	44	16020	9500	5600	1.12
	150	24	1.5	63.7	54	6020	9500	5600	1.25
	180	34	2.1	127	93	6220	7500	4800	3.19
	180	34	2.1	127	93	6220-Z	7500	3800	3.3
	215	47	3	174	140	6320	6700	4300	7.07
	215	47	3	174	140	6320M	6700	6000	8.89
	250	58	4	222	195	6420	6000	4000	12.9
	180	28	1.5	89	92	68220X2	7500	4800	2.7
	125	13	1	17.8	18.3	61820-2RS1		3000	0.346
	140	20	1.1	42.3	41	61920M	9500	6000	1.08
	140	20	1.1	42.3	41.5	61920	9500	6000	0.96
105	160	26	2	76.1	65.5	6021	8500	5300	1.53
	160	18	1	54	51	16021	8500	5300	1.2
	190	36	2.1	140	104	6221	7000	4500	3.78
	180	22	1.1	52	65	6721	7500	5000	2.61
	225	49	3	182	153	6321	6300	4000	8.25
110	170	19	1	60.5	57	16022	8000	5000	1.79
	170	28	2	85.2	73.5	6022	8000	5000	2.07
	170	28	2	85.2	73.5	6022M	8000	7000	2.72
	170	28	2	85.2	73.5	6022-ZZ	8000	4000	2.05
	200	38	2.1	151	118	6222	6700	4300	4.42
	200	38	2.1	151	118	6222-ZZ	6700	3400	4.61
	240	50	3	203	180	6322	6000	3800	9.53
	280	65	4	225	238	6422	2000	2800	18.34
	140	16	1	28.1	26	61822	9500	5600	0.6
	150	20	1.1	43.6	45	61922	9000	5600	0.84
120	180	28	2	88.4	80	6024	7500	4800	2.21
	180	28	2	88.4	80	6024-2RS1		2200	2.21
	180	19	1	63.7	64	16024	7500	4800	1.8
	180	28	2	88.4	80	6024-ZZ	7500	3800	2.31
	215	40	2.1	146	118	6224	6300	4000	6.4
	215	40	2.1	146	118	6224M	6300	5600	6.33
	260	55	3	208	186	6324	5600	3400	16
	260	55	3	208	186	6324M	5600	5000	15.44
	150	16	1	29.1	28	61824	8500	5300	0.65
	165	22	1.1	55.3	57	61924MA	8000	5000	1.4

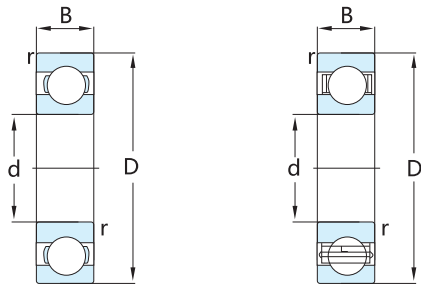

基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Limiting Speed Speed r/min		质量 Mass
d	D	B	r _{smin}	C	C ₀	-			kg
130	200	22	1.1	83.2	81.5	16026	7000	4300	2.76
	200	33	2	112	100	6026	7000	4300	3.3
	230	40	3	156	132	6226	5600	3600	6.12
	280	58	4	229	216	6326M	5000	4500	17.5
	280	58	4	229	216	6326	5000	3200	15
	190	19	0.7	43	60	726	6000	5000	1.7
	190	19	0.7	43	60	726M	6000	5000	1.67
	180	24	1.5	65	67	61926MA	7500	5500	1.8
	180	24	1.5	65	67	61926M	7500	5500	1.8
	180	24	1.5	65	67	61926	7500	4500	1.56
137.5	215	40	4			543574			5.64
140	210	33	2	111	108	6028M	6700	5300	4
	210	33	2	111	108	6028	6700	4000	3.2
	210	33	2	111	108	6028Z	6700	3200	3.55
	250	42	3	165	150	6228	5300	3400	7.77
	210	22	1.1	80.6	86.5	16028M	6700	5300	2.86
	210	22	1.1	80.6	86.5	16028	6700	4000	2.57
	300	62	4	251	245	6328M	4800	4300	23.1
	300	62	4	251	245	6328	4800	3000	18.33
	175	18	2.5	39	46.5	61828M	7500	6000	0.93
	175	18	2.5	39	46.5	61828	7500	4500	0.87
	190	24	1.5	66.3	72	61928MA	7000	5600	2.06
	190	24	1.5	66.3	72	61928	7000	4300	1.9
150	225	35	2.1	125	125	6030M	6000	5000	4.9
	225	35	2.1	125	125	6030	6000	3800	4.3
	225	24	1.1	92.2	98	16030M	6000	4500	3.77
	225	24	1.1	92.2	98	16030	6000	3800	3.1
	270	45	3	174	166	6230MB	5000	4500	11.24
	270	45	3	174	166	6230M	5000	4500	11.24
	270	45	3	174	166	6230	5000	3200	9.85
	320	65	4	276	285	6330	4300	4000	25.96
	210	28	2	88.4	93	61930MA	6300	5300	3.16
	190	20	1.1	48.8	61	61830MA	6700	4300	1.4
	224.5	35	2.1	125	125	6030X1M	6000	3800	4.98
160	240	38	2.1	143	143	6032M	5600	4800	6.08
	240	38	2.1	143	143	6032	5600	3600	5.2
	240	25	1.5	99.5	108	16032	5600	3600	4.6
	290	48	3	186	186	6232M	4500	4300	14.6
	340	68	4	276	285	6332M	4000	3800	30
	340	68	4	276	285	6332	4000	2600	26.43
	200	20	1.1	49.4	64	61832	6300	4000	1.25
	220	28	2	92.3	98	61932	6000	3800	3.16




基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Limiting Speed Speed r/min		质量 Mass
d	D	B	r _{smin}	C	C ₀				kg
165	250.5	35	2.5	125	156	733	5500	4500	6.44
170	259.5	42	2.1	168	173	6034X1	5300	4300	6.88
	260	42	2.1	168	173	6034	5300	3200	8.42
	310	52	4	212	224	6234	4300	2800	16
	260	28	1.5	119	129	16034F3	5300	4000	6
	260	28	1.5	119	129	16034	5300	3200	5
	360	72	4	312	340	6334M	3800	3400	36.98
	360	72	4	312	340	6334	3800	2400	31.3
	215	22	1.1	61.8	78	61834	6000	3600	1.81
	230	28	2	93.6	106	61934MA	5600	4800	3.4
	260	42	2.1	168	173	6034M	5300	4300	8.6
	270	42	2.5	168	173	6034X1M	5300	4300	9.6
180	280	46	2.1	190	200	6036M	4800	4000	10.5
	280	46	2.1	190	200	6036	4800	4000	9.04
	279.5	46	2.1	190	200	6036X1M	4800	4000	11
	280	31	2	138	146	16036	4800	3000	7.3
	320	52	4	229	240	6236M	4000	3800	18
	380	75	4	351	405	6336	3600	2200	36.5
	225	22	1.1	62.4	81.5	61836	5600	3400	2
	250	33	2	119	134	61936	5300	3200	5
	259.5	33	2	119	134	61936X1	5300	3200	5
	250	33	2	119	134	61936MA	5300	4300	5
190	240	24	1.5	76.1	98	61838	5300	3200	2.8
	260	33	2	117	134	61938	5000	3200	4.5
	269.5	33	2	117	134	61938X1M	5000	4300	6.87
	290	31	2	148	166	16038	4800	3000	6.9
	290	46	2.1	195	216	6038	4800	3000	9.55
	340	55	4	255	280	6238	3800	2400	19.5
	340	55	4	255	280	6238M	3800	3400	23
	400	78	5	371	430	6338	3400	2200	42
200	230	22	1	55	80	6640M-2	4000	3000	1.51
	250	24	1.5	76.1	102	61840	5000	3200	3
	250	33	1.5	110	140	6640M-1	4000	3000	3.92
	269.5	51	2.1	148	166	61940X3M	4800	3800	7.2
	279.5	38	2.1	148	166	61940X1M-1	4800	3800	7.25
	280	38	2.1	148	166	61940MA	4800	3800	7.3
	280	38	2.1	148	166	61940	4800	3000	6.3
	310	34	2	168	190	16040	4300	2800	8.8
	310	51	2.1	216	245	6040	4300	2800	12.5
	310	51	2.1	216	245	6040M	4300	3600	14.3
	360	58	4	270	310	6240	3600	2200	23.5
	360	58	4	270	310	6240M	3600	3200	26.7
	420	80	5	350	430	6340	3000	2800	56

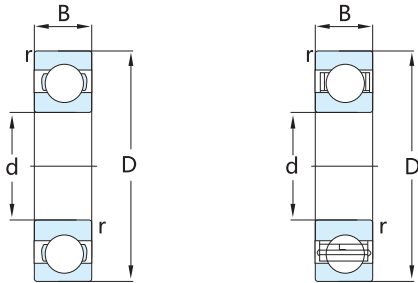


基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Speed Limiting Speed r/min		质量 Mass
d	D	B	r _{min}	C	C ₀	-			kg
220	270	24	1.5	78	110	61844	4500	2800	2.55
	300	38	2.1	151	180	61944	4300	2600	6.8
	300	38	2.1	151	180	61944MA	4300	3600	7.95
	300	70	2.1	136	162	63944M	3000	2800	11.7
	309.5	38	2.1	151	180	61944X1M	4300	3600	9.3
	340	37	2.1	174	204	16044	4000	2400	12.7
	340	56	3	247	290	6044	4000	2400	16
	400	65	4	296	365	6244	3200	2000	33.5
	460	88	5	410	520	6344M	3000	2600	73
230	329.5	40	2.1	190	228	61946X3M	3500	2600	11.6
240	300	28	2	108	150	61848	4000	2600	4.7
	320	38	2.1	159	200	61948	4000	2400	8.36
	360	37	2.1	203	255	16048	3600	2200	12.5
	359.5	56	3	255	315	6048X1M	3600	3000	20.7
	360	56	3	255	315	6048	3600	2200	17
	440	72	4	358	465	6248M	3000	2600	51.5
	500	95	5	442	585	6348M	2600	2400	97
260	320	28	2	111	163	61852	3800	2400	4.9
	360	46	2.1	212	270	61952	3600	2200	12
	360	46	2.1	212	270	61952MA	3600	3000	14.5
	370	46	2.1	212	270	61952X1M/1	3600	3000	17
	369.5	60	2.1	212	270	62952X1M-1	3600	3000	19.5
	379.5	60	4	253	320	62952X1M-2	3600	3000	22
	400	44	3	238	310	16052MA	3200	2800	22.5
	400	44	3	238	310	16052	3200	2000	18
	400	65	4	291	375	6052	3200	2000	25
	480	80	5	390	530	6252M	2600	2400	66
	540	102	6	480	670	6352	2000	1800	116
	400	65	4	291	375	6052M	3200	2800	29
280	350	33	2	138	200	61856	3400	2200	7.5
	350	33	3.8	138	200	62956X3M	3400	2800	7.25
	380	46	2.1	216	285	61956	3200	2000	12
	380	46	2.1	216	285	61956MA	3200	2800	15.5
	420	44	3	242	335	16056MA	3000	2600	23.5
	420	44	3	242	335	16056	3000	1900	19
	420	65	4	302	405	6056	3000	1900	26
	420	65	4	302	405	6056M	3000	2600	32.2
	500	80	5	423	600	6256M	2600	2200	72
	580	108	6	550	800	6356	1800	1200	140


基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Speed Limiting Speed r/min		质量 Mass
d	D	B	r _{min}	C	C ₀				kg
300	380	38	2.1	172	245	61860	3200	2000	8.9
	420	56	3	270	375	61960	3000	1900	19
	420	56	3	270	375	61960MA	3000	2400	24.5
	460	50	4	260	405	16060	2800	2400	33
	460	68	4	358	500	6060X2	2800	2400	49
	460	74	4	358	500	6060M	2800	2400	44.7
	540	85	5	462	670	6260M	2400	2000	88.5
	459.5	74	4	358	500	6060X1	2800	2400	45
	479	60	4	286	405	16060X3	2800	2400	45
320	400	38	2.1	172	255	61864	3000	1900	9.5
	400	38	2.1	172	255	61864MA	3000	2400	11
	440	37	2.1	276	400	16964	2800	2400	17
	440	56	3	276	400	61964MA	2800	2400	25.5
	480	50	4	281	405	16064MA	2600	2200	34
	480	74	4	371	540	6064M	2600	2200	46.7
	580	92	5	500	750	6264	2000	1500	110
	459.5	70	3	470	530	62964X3	1300	1500	48.4
	459.5	60	4	470	530	61964X3	1300	1500	34
340	420	38	2.1	178	275	61868	2800	1800	10
	460	56	3	281	425	61968MA	2600	2200	27
	520	57	4	345	520	16068MA	2400	2000	45
	520	82	5	423	640	6068M	2400	2000	65.8
	620	92	6	520	850	6268	1800	1500	115
360	440	25	1.5	110	190	60872	3000	2400	7
	440	38	2.1	182	285	61872MA	2600	2200	13
	480	56	3	291	450	61972MA	2600	2200	28.5
	509.5	70	4	290	560	61972X3	2600	2200	47.2
	540	57	4	351	550	16072MA	1800	1400	50
	540	82	5	442	695	6072M	2400	1900	65
	650	95	6	555	905	6272	1800	1400	145
380	480	46	2.1	242	390	61876MA	2400	2000	20
	520	65	4	338	540	61976MA	2400	1900	40
	560	57	4	377	620	16076MA	2200	1400	52
	560	82	5	436	695	6076M	2200	1800	70.5
400	500	31	2	150	255	60880	2400	1900	17
	500	46	2.1	247	405	61880MA	2400	1900	22
	540	44	3	240	400	60980	2000	1500	29
	540	65	4	345	570	61980MA	2200	1800	43.6
	600	90	5	520	865	6080M	2000	1700	87.5

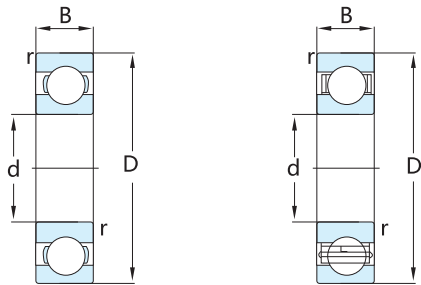

基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Limiting Speed Speed r/min		质量 Mass
d	D	B	r _{min}	C	C ₀	-			kg
mm	mm	mm	mm	kN	kN	-			
410	559.5	82	4	287	620	61982X2	2000	1600	54
420	520	46	2.1	251	425	61884MA 61984MA 6084M	2200	1800	23
	560	65	4	351	600		2200	1800	45
	620	90	5	507	880		2000	1600	94
440	540	31	2	145	265	60888 61888MA 61988MA 6088M	2500	2000	18
	540	46	2.1	255	440		2200	1800	24
	600	74	4	410	720		2000	1600	63
	650	94	6	553	965		1900	1500	110
460	580	56	3	319	570	61892MA 61992MA 6092MB	2000	1600	35.6
	620	74	4	423	750		1900	1600	63
	680	100	6	582	1060		1800	1500	125
480	600	56	3	325	600	61896MA 61996MA 6096MB	1900	1600	37
	650	78	5	449	815		1800	1500	75
	700	100	6	618	1140		1700	1400	128
500	620	37	2.1	210	410	608/500 618/500MA	2000	1800	21
	620	56	3	332	620		1800	1500	40.5
	670	78	5	462	865	619/500MA 160/500X1 60/500MA	1700	1400	82
	719	71	5	630	1170		1800	1500	111
	720	100	6	605	1140		1600	1300	138
530	650	56	3	332	655	618/530MA 609/530 619/530MA 60/530MAS	1700	1400	40
	710	57	4	400	770		1700	1400	62
	710	82	5	488	930		1600	1300	92
	780	112	6	650	1270		1500	1200	190
560	680	37	2.1	210	440	608/560 618/560MA 619/560MA 60/560MAS	1700	1400	31
	680	56	3	345	695		1600	1300	43
	750	85	5	494	980		1500	1200	108
	820	115	6	663	1370		1400	1200	212
600	730	42	3	250	520	608/600 618/600MA 619/600MA B600-17/HC 60/600MA	1600	1300	41
	730	60	3	364	765		1500	1200	53
	800	90	5	585	1220		1400	1100	126
	819	90	5	590	1200		1400	1100	135.4
	870	118	6	728	1500		1300	1100	232



基本尺寸 Basic Size				基本额定负荷 Basic load rating 动态dynamic 静态static		代号 Code	额定转速 Speed Ratings 参考转速 极限转速 Reference Limiting Speed Speed r/min		质量 Mass
d	D	B	r _{min}	C	C ₀	-			kg
mm	mm	mm	mm	kN	kN	-			
630	780	48	3	340	720	608/630 618/630MA 609/630 619/630MA 60/630MBS	1600	1300	42
	780	69	4	442	965		1400	1100	74
	850	71	5	460	1000		1500	1200	112
	850	100	6	624	1340		1300	1100	162
	920	128	7.5	819	1760		1200	1000	287
670	820	69	4	442	1000	618/670MA 609/670 619/670MA 60/670MAS	1300	1100	83.5
	900	73	5	520	1150		1300	1100	148
	900	103	6	676	1500		1200	1000	192
	980	136	7.5	904	2040		1100	900	348
710	870	74	4	475	1100	618/710MA 609/710 619/710MA 60/710MA	1200	1000	95
	950	78	5	510	1200		1300	1000	152
	950	106	6	663	1500		1100	900	223
	1030	140	7.5	956	2200		1000	850	382
750	920	78	5	527	1250	618/750MA 619/750MA 60/750MA	1100	900	113
	1000	112	6	761	1800		1000	850	260
	1090	150	7.5	995	2360		950	800	490
800	980	57	4	370	920	608/800 618/800MA 619/800MA 60/800MAS	1100	1000	103
	980	82	5	559	1370		1000	850	135
	1060	115	6	832	2040		950	800	280
	1150	155	7.5	1010	2550		900	750	540
850	1030	57	4	365	930	608/850 618/850MA 619/850MA 60/850	950	750	78
	1030	82	5	559	1430		950	750	145
	1120	118	6	852	2120		850	750	320
	1220	165	7.5	1030	2650		650	500	635
900	1090	85	5	618	1600	618/900MA 619/900 60/900	850	700	167
	1180	122	6	780	2050		600	450	355
	1280	170	7.5	1040	2800		500	400	725
950	1150	90	5	637	1730	618/950MA 619/950 60/950	800	670	197
	1250	132	7.5	925	2520				395
	1360	180	7.5	1070	2930				870
1000	1220	71	5	505	1410	608/1000 618/1000MA 609/1000 619/1000 60/1000	750	600	180
	1220	100	6	637	1800				250
	1320	103	6	750	2125				415
	1320	140	7.5	925	2520				520
	1420	185	7.5	1240	3510				940
1060	1280	100	6	728	2120	618/1060MA 619/1060 60/1060	670	560	265
	1400	150	7.5	930	2700				630
	1500	195	9.5	1250	3510				1100
1120	1360	106	6	741	2200	618/1120MA	630	530	320

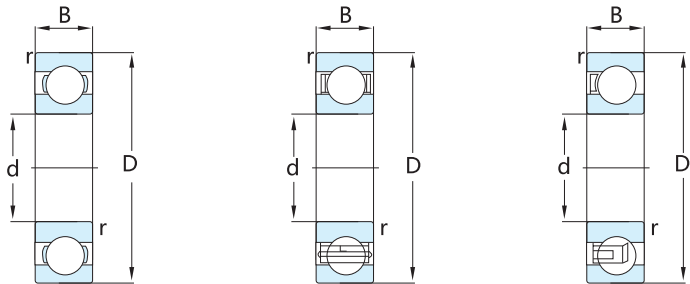

基本尺寸 Basic Size				基本额定负荷 Basic load rating		代号 Code	额定转速 Speed Ratings		质量 Mass
d	D	B	r _{smin}	动态dynamic C	静态static C ₀		参考转速 Reference Speed	极限转速 Limiting Speed	
mm				kN		-	r/min		kg
1120	1460	150	7.5	960	2790	619/1120 60/1120			660
	1580	200	9.5	1350	3960				1270
1180	1420	106	6	761	2360	618/1180MB D618/1180F1 619/1180 60/1180	560	480	337
	4420	106/166	6	890	3650				450
	1540	160	7.5	1050	3240				780
	4660	212	9.5	1710	4680				1420
1250	1500	112	6	785	2475	618/1250 619/1250 60/1250			390
	1630	170	7.5	1290	3510				925
	1750	218	9.5	1840	5040				1620
1320	1600	122	6	856	3150	618/1320MA 609/1320 619/1320 60/1320	480	400	510
	1720	128	7.5	1110	3650				840
	1720	175	7.5	1410	4050				1060
	4850	230	12	1950	5580				1900
1400	1700	132	7.5	1030	3600	618/1400 619/1400 60/1400			620
	1820	185	9.5	1465	4950				1260
	4950	243	12	2135	6260				2190
1500	1820	140	7.5	1170	4150	618/1500 619/1500 60/1500	380	240	750
	1950	195	9.5	1580	5490				1520
	4120	272	12	2400	7340				3000
1600	1950	155	7.5	1170	4320	618/1600 619/1600 60/1600			970
	2060	200	9.5	1715	6260				1660
	4240	280	12	2580	8240				3390
1700	2060	160	7.5	1170	4410	618/1700 619/1700 60/1700			1120
	2180	212	9.5	1830	6885				1980
	4360	290	15	2670	8850				3800
1800	2300	218	12	2025	6750	619/1800 60/1800			2200
	2500	308	15	3080	10600				4550
1900	2430	230	12	2210	7785	619/1900			2600

更多型号请咨询WKB公司代表。
please consult WKB